

Flicker Test Report

FLICKER CLASSIFICATION (IEEE 1789-2015): No observable effect level NOEL
SVM (IEC TR 63158): PASS (Test value: 0.009 +- 0.000, Acceptance limit < 0.9)
Pst LM (IEC TR 61547-1): PASS (Test value: 0.144 +- 0.006, Acceptance Limit < 1.0)
Tolerances are evaluated by 2 x standard deviations (k=2, 95% confidence level).


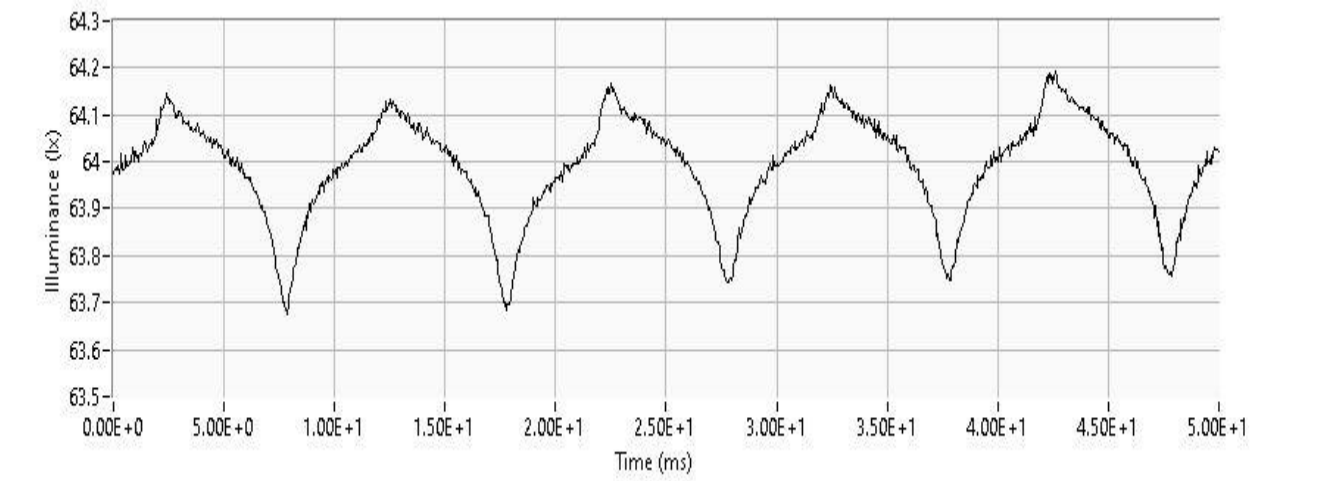


Table. Flicker analysis summary. The values have been calculated as an average of consecutive repetition measurements.

	Value	St.dev.
Average signal	63.90	0.08
Mean signal	63.87	0.03
Max signal	64.22	0.03
Min signal	63.52	0.04
Percent flicker (%)	0.55	0.01
Flicker index	0.0010	0.0005
Flicker frequency (Hz)	100.0	0.0
Pulse width (ms)	6.86	1.6
SVM	0.0087	0.0001
Pst LM	0.1440	0.0032

Figure. Illuminance as a function of time in one period. The graph is calculated for the latest signal period.

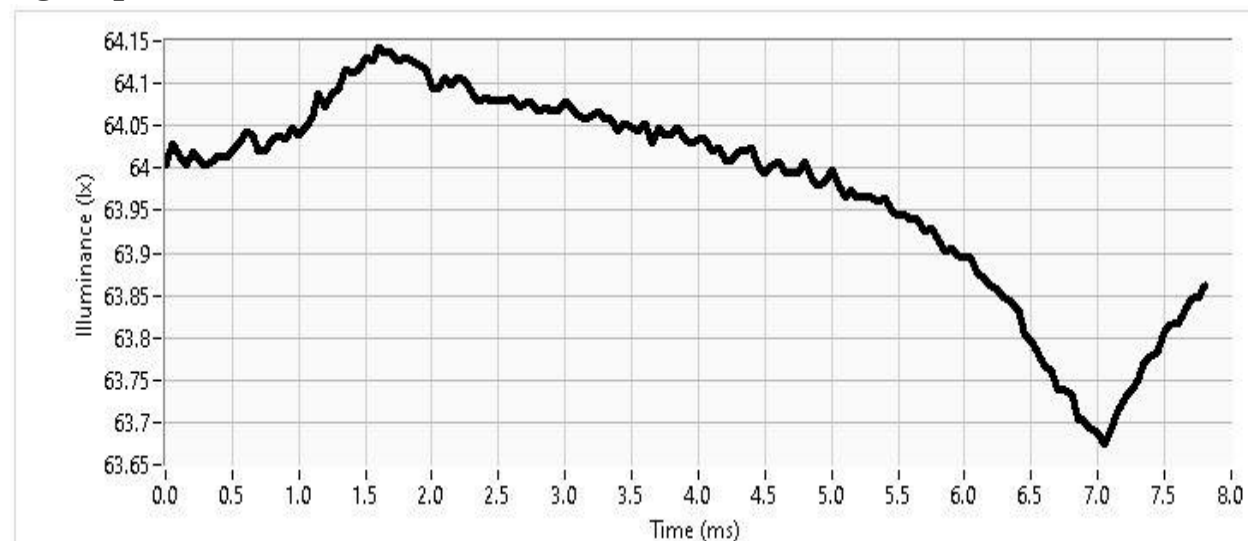

Figures below show the data as a function of consecutive measurement repeats.

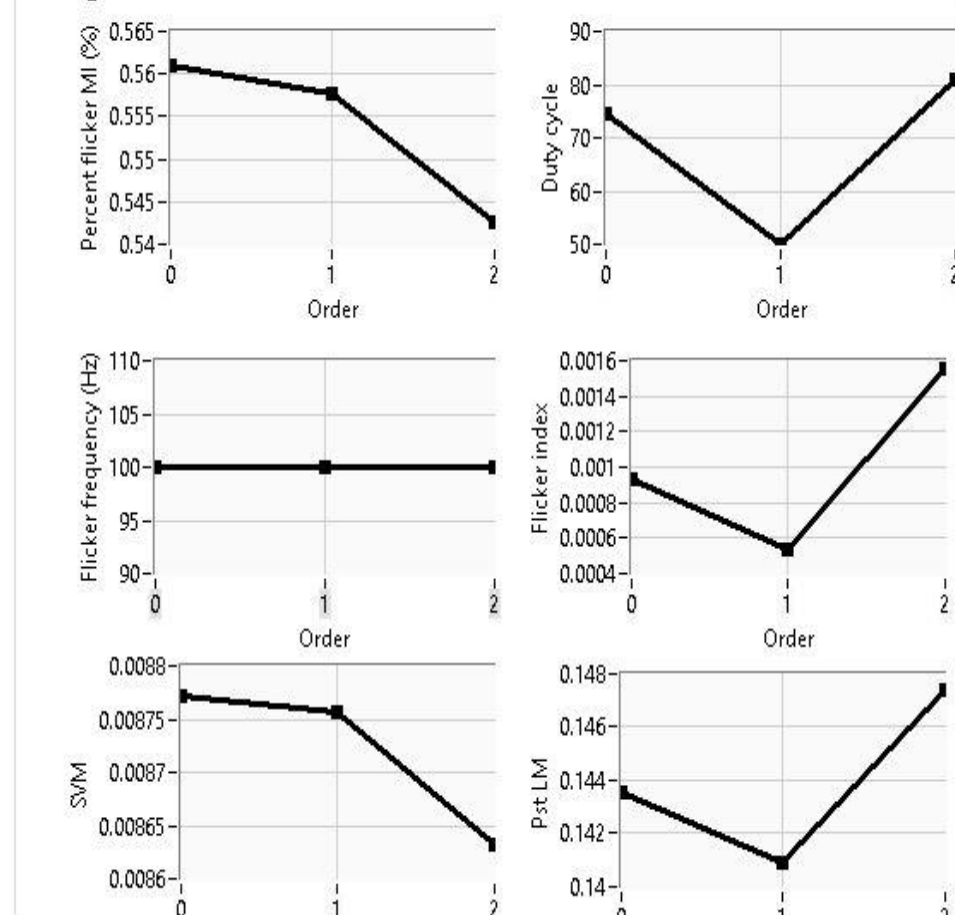


Figure. Modulation index (%) vs. Flicker Frequency according to IEEE 1789.

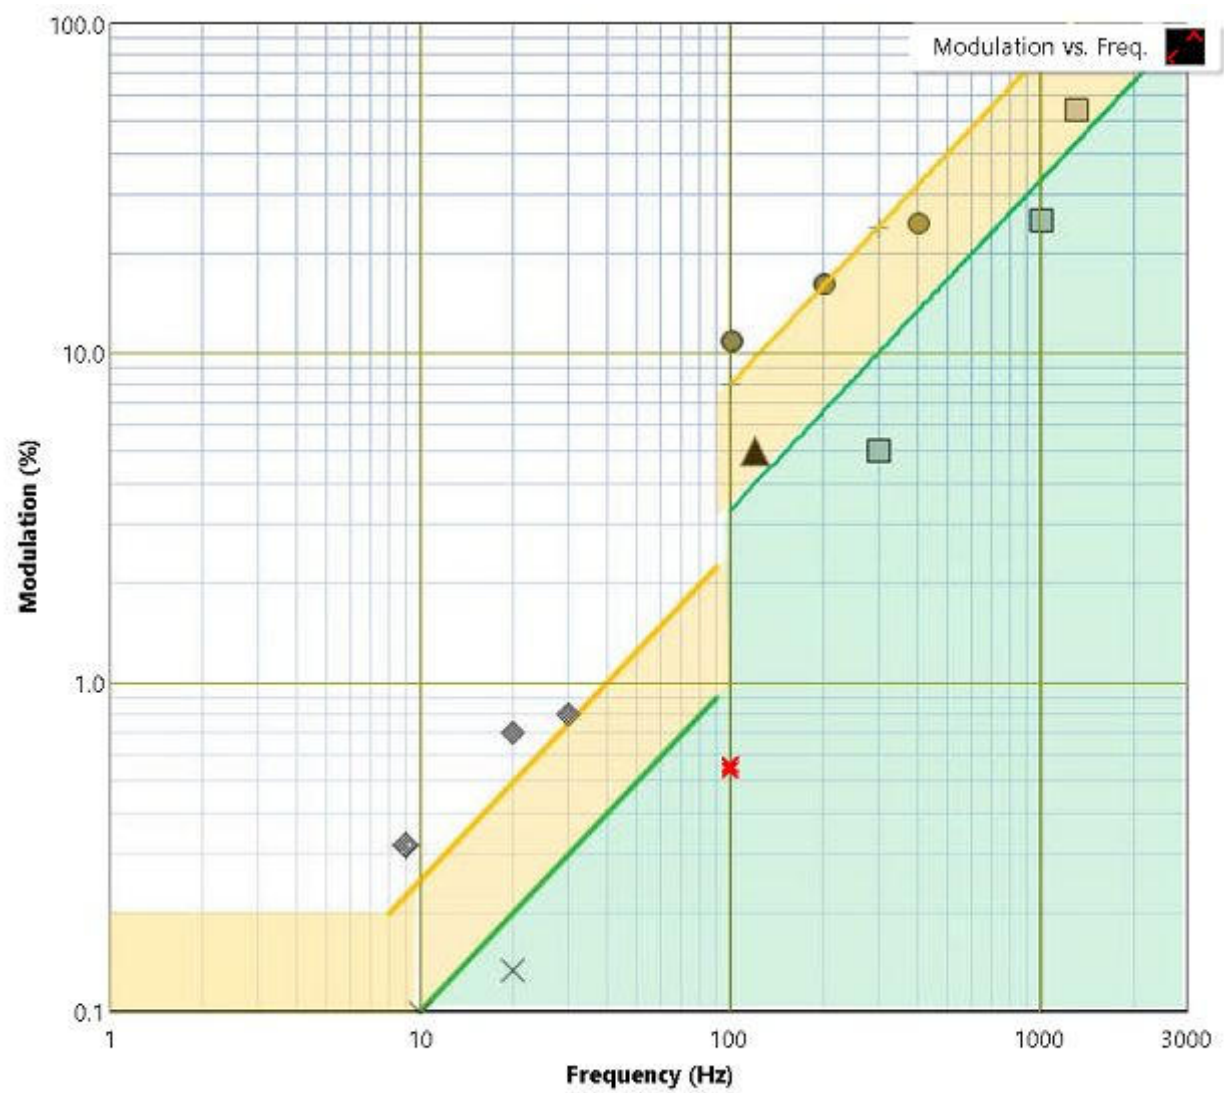


Figure. Pst_LM long signal shape.

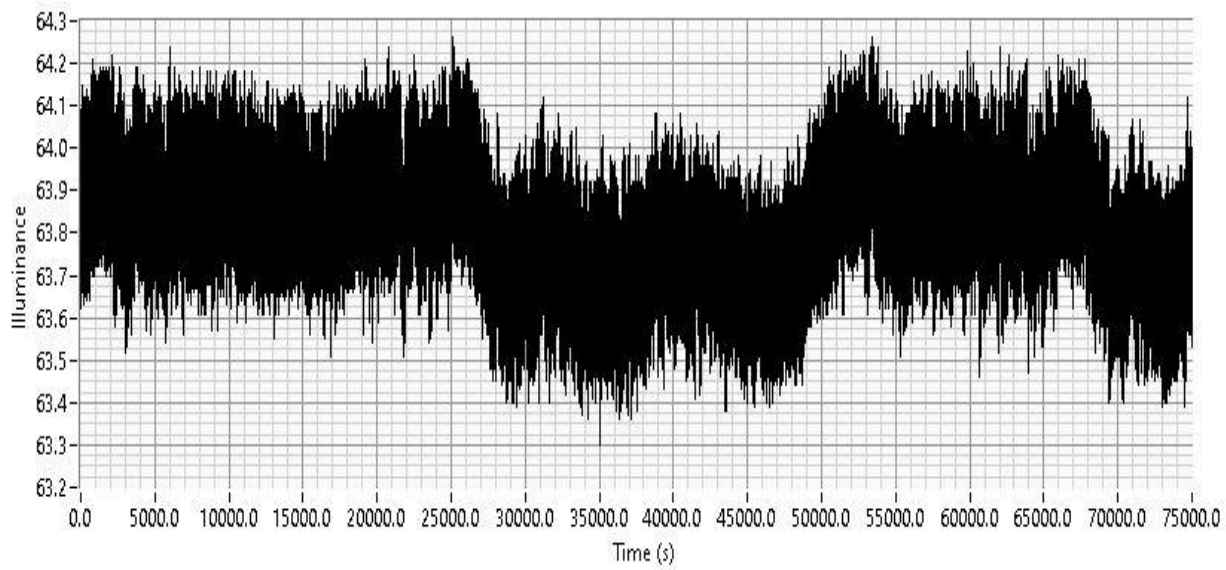


Figure. Fast-Fourier transform for frequency analysis (SVM).

Harmonic order	Frequency (Hz)	Magnitude (%)
0	0	95.1
1	100	0.1

